

**DELTA
FIRE**




DF3000 TRAILER MONITOR

KEY USERS

- Airport Fire Services
- Major Industrials
- Fuel Storage Sites
- Oil & Gas
- Petrochemicals
- Waste Recycling
- Chemical Facilities

KEY FACTS

- Rapid Deployment
- Quick Action Break Release
- Locking Outrigger Stabiliser
- Flows up to 3000 LPM
- Long-Reach Capabilities
- Adjustable Horizontal & Vertical Elevation
- Optional Hose racks
- Stainless Steel Chassis Versions
- 3" Waterway

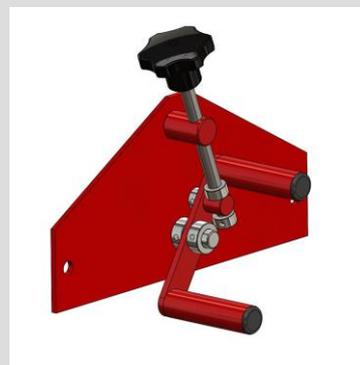

New improved Quick
Acting Break System

Doc Ref: DDS049

DELTA FIRE

Broadland Business Park, Norwich, Norfolk, UK, NR7 0FE

T: +44(0)1603 735000 | E: sales@deltafire.co.uk | E: export@deltafire.co.uk

deltafire.co.uk

GENERAL DESCRIPTION

The Delta **DF3000 Wheeled Monitor** incorporates all the advantages of a low-friction single waterway fire monitor with the added benefit of one-man wheeled maneuverability.

The full 3" waterway provides flows of up to 3000 LPM (795 GPM) for maximised performance and incorporates the Delta DNB2600 jet/spray monitor nozzle. With full 360° rotation capabilities and adjustable elevation of 90° above and 60° below the horizontal, the DF3000 is manufactured in corrosion resistant materials and ideally suited for use on Petrochemical Refineries, Airports and any other high risk applications. Vertical and Horizontal quick-action locks allow the operator to fix the monitor swiftly to any position allowing unmanned operation.

The DF3000 is available in a number of formats including stainless steel chassis versions for extreme environment use. The new improved quick acting break release system provides easy access to break controls and reduces wear on wheel rims. Supplied complete with a lockable stabilizing outrigger and fitted with twin inlets suitable for use with any International adaptors for compatibility with existing hoses.

TECHNICAL DATA

Product Code	Model	Inlet	Nozzle	Maximum Flow	Rotation	Elevation	Chassis Material
MON101020	DF3000 Trailer Monitor	3" ANSI Flange	DNB2600 Jet/Spray Foam/Water Nozzle	3000 LPM (795 GPM)	360°	90° Above & 60° Below Horizontal	Red Powder Coated Carbon Steel
MON101025	DF3000 Trailer Monitor	4" ANSI Flange	DNB2600 Jet/Spray Foam/Water Nozzle	3000 LPM (795 GPM)	360°	90° Above & 60° Below Horizontal	Red Powder Coated Carbon Steel
MON101120	DF3000 Trailer Monitor	3" ANSI Flange	DNB2600 Jet/Spray Foam/Water Nozzle	3000 LPM (795 GPM)	360°	90° Above & 60° Below Horizontal	Stainless Steel
MON101125	DF3000 Trailer Monitor	4" ANSI Flange	DNB2600 Jet/Spray Foam/Water Nozzle	3000 LPM (795 GPM)	360°	90° Above & 60° Below Horizontal	Stainless Steel

Length (inc Handle)	1470mm
Width	995mm
Height	610mm



DELTA FIRE

Broadland Business Park, Norwich, Norfolk, UK, NR7 0FE

T: +44(0)1603 735000 | E: sales@deltafire.co.uk | E: export@deltafire.co.uk

deltafire.co.uk